


# GCL-P6/72GW


Dual Glass  
Polycrystalline Module

325-360W

Cell Type



5BB



MBB

**360W**

Maximum Power Output

**18.4%**

Maximum Module Efficiency

**0~+5W**

Power Output Guarantee



Ideal choice for large scale ground installation



High conversion efficiency due to top quality wafers and advanced cell technology



Selected encapsulating material and stringent production process control ensure the product is highly PID resistant and snail trails free



Additional safety, Fire class A certified



Withstand up to 1500V system voltage effectively reduce BOS cost



Sand blowing test, salt mist test and ammonia test passed to endure harsh environments


## Company Introduction

GCL System Integration Technology Co. Ltd (002506 Shenzhen Stock) (GCL System) is part of GOLDEN CONCORD Group (GCL) which is an international energy company specializing in clean and sustainable power production. The group, founded in 1990 now employs 30,000 people.

## GCL Delivers Reliable Performance Over Time

- World-class manufacturer of crystalline silicon photovoltaic modules
- Fully automatic facility and world-class technology
- Rigorous quality control to meet the highest standard: ISO9001:2015, ISO14001: 2015 and OHSAS: 18001 2007
- Tested for harsh environments (salt mist, ammonia corrosion and sand blowing test: IEC 61701, IEC 62716, DIN EN 60068-2- 68)
- Long term reliability tests
- 2\*100% EL inspection ensuring defect-free modules

## Linear Performance Warranty

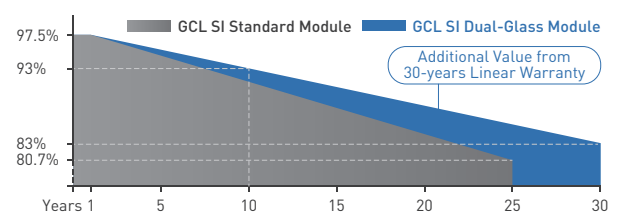

10 Years Product Warranty 30 Years Linear Power Warranty

\* Please refer to GCL standard warranty for details

## Additional Insurance Backed by Swiss RE



\* Please refer to GCL for details

# GCL-P6/72GW

## GCL-Jupiter Series Dual Glass Polycrystalline Module

325-360W

### Electrical Specification (STC\*)

Maximum Power	P <sub>max</sub> (W)	325	330	335	340	345	350	355	360
Maximum Power Voltage	V <sub>mp</sub> (V)	37.60	37.80	38.00	38.20	38.90	39.20	39.49	39.78
Maximum Power Current	I <sub>mp</sub> (A)	8.64	8.73	8.82	8.90	8.87	8.93	8.99	9.05
Open Circuit Voltage	V <sub>oc</sub> (V)	46.00	46.20	46.40	46.60	47.30	47.60	47.90	48.20
Short Circuit Current	I <sub>sc</sub> (A)	9.24	9.33	9.41	9.49	9.61	9.68	9.74	9.80
Module Efficiency	(%)	16.6	16.9	17.2	17.4	17.7	17.9	18.2	18.4
Power Output Tolerance	(W)								0~+5

\* Irradiance 1000W/m<sup>2</sup>, Module Temperature 25°C, Air Mass 1.5

### Electrical Specification (NOCT\*)

Maximum Power	P <sub>max</sub> (W)	242.56	246.40	250.28	254.18	258.12	261.36	265.35	269.38
Maximum Power Voltage	V <sub>mp</sub> (V)	34.90	35.10	35.30	35.50	35.80	36.00	36.30	36.60
Maximum Power Current	I <sub>mp</sub> (A)	6.95	7.02	7.09	7.16	7.21	7.26	7.31	7.36
Open Circuit Voltage	V <sub>oc</sub> (V)	42.90	43.10	43.30	43.50	44.10	44.40	44.70	45.00
Short Circuit Current	I <sub>sc</sub> (A)	7.46	7.53	7.59	7.66	7.75	7.81	7.86	7.91

\* Irradiance 800W/m<sup>2</sup>, Ambient Temperature 20°C, Wind Speed 1m/s

### Mechanical Data

Solar Cell Type	Poly 156.75x156.75mm (6 inches)
Number of Cells	72Cells (6x12)
Dimensions of Module L*W*H (mm)	1968x992x6mm
Weight (kg)	27kg
Front Side Glass	High transparency solar glass 2.5mm (0.13 inches)
Back Side Glass	Float solar glass 2.5mm (0.13 inches)
J-Box	IP68 Rated
Cable	4.0mm <sup>2</sup> [0.006 inches <sup>2</sup> ], length of '+': 225mm, length of '-': 75mm
Wind/ Snow Load	2400Pa/5400Pa*
Connector	MC4 Compatible

\* For more details please check the installation manual of GCLSI

### Temperature Ratings

Nominal Operating Cell Temperature (NOCT)	44±2°C
Temperature Coefficient of I <sub>sc</sub>	+0.050%/°C
Temperature Coefficient of V <sub>oc</sub>	-0.30%/°C
Temperature Coefficient of P <sub>MAX</sub>	-0.39%/°C

### Maximum Ratings

Operational Temperature	-40~+85°C
Maximum System Voltage	1500V DC
Max Series Fuse Rating	15A

### Optional

Connector:  Original MC4

### Packaging Configuration


Module per box	30 pieces
Module per 40' container	660 pieces




Contact Us for More Information

website: [en.gclsi.com](http://en.gclsi.com) email: [gclsisales@gclsi.com](mailto:gclsisales@gclsi.com)


### Module Dimension

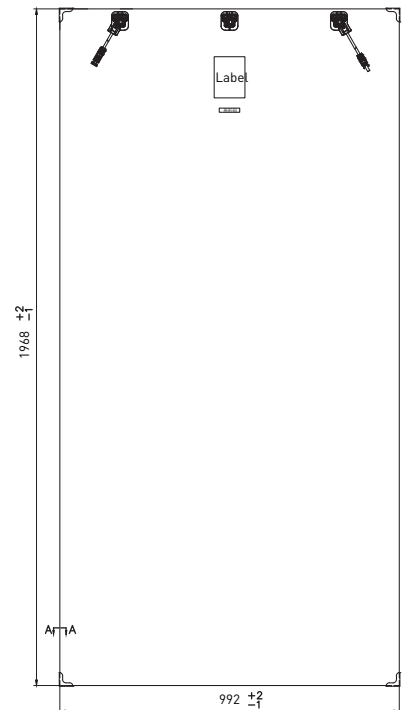


Back View



### U-I Curve at Different Temperature (345W)

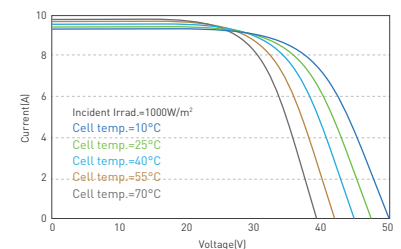

### U-I/P-U Curve at Different Irradiation (345W)

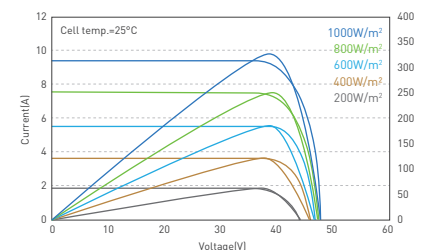

CAUTION: READ INSTALLATION MANUAL BEFORE USING THE PRODUCT